





Kit includes : Base, bungee pole set,
top rail and carry bag

①

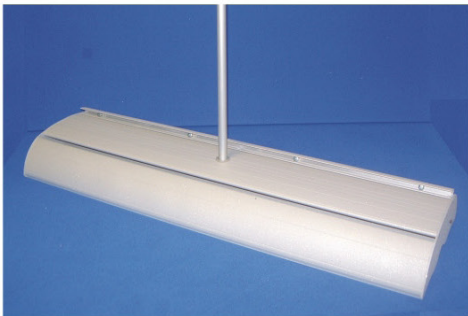

Assemble the bungee pole and insert into the base

②

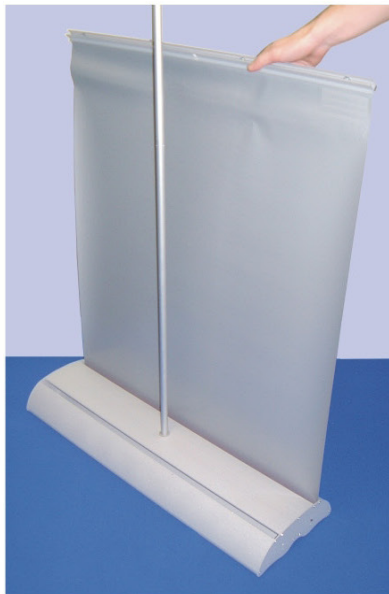

Lean the bannerstand backwards and
extend the banner by lifting the top rail
until the complete image is visible

Technical Specification

Visible graphic area : 2145mm approx (H) x 600mm to 2000mm (W)
depending upon the version supplied

Note : Add 200mm to the graphic length to allow for the roller
Unit weight inc. carry bag : 6.45kg approx (800mm version)

Guidelines for Graphic substrates

- 1, Material thickness must be between 225 and 300 microns in total
- 2, The substrate must be pliable and suitable for roller bannerstands
- 3, After fitting, the graphic should be left for 24 hours before use to ensure the adhesive bonds sufficiently

③




Finally secure the banner into position
by locating the top rail hole
with the bungee pole

Take care when lowering the banner
to prevent damage to the graphic
(do not drop)

When changing banners please refer
to separate instruction sheet UI099

Locking pin

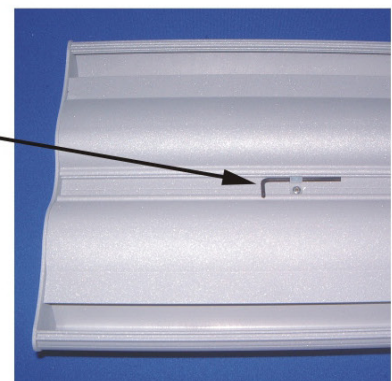

A spare locking pin can be found on the
underside of the unit
(For use when changing banners)
Refer to separate instruction sheet UI099