

excaliber 2

user instructions



Kit includes : Base, bungee pole set, two top rails and carry bag

①




Assemble the bungee pole and insert into the base

②



Lean the bannerstand backwards and extend each banner by lifting the top rail until the complete image is visible


③

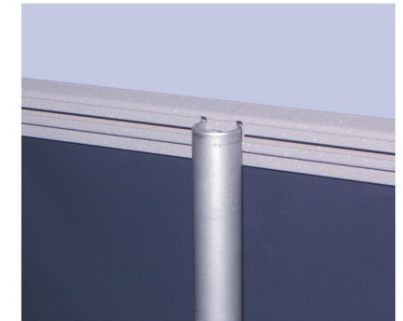

Secure each banner into position by locating the bungee pole into the top rail slots



Assembled Excaliber 2



Locking pin

A spare locking pin can be found on the underside of the unit
(For use when changing banners)

Note:

- 1, Take care when lowering each banner to prevent damage to the graphic (do not drop)
- 2, When changing banners please refer to separate instruction sheet UI099

Technical Specification

Visible graphic area : 2145mm approx (H) x 600mm to 2000mm (W) depending upon the version supplied

Note : Add 200mm to the graphic length to allow for the roller
Unit weight inc. carry bag : 8kg approx (800mm version)

Guidelines for Graphic substrates

- 1, Material thickness must be between 225 and 300 microns in total
- 2, The substrate must be pliable and suitable for roller bannerstands
- 3, After fitting, the graphic should be left for 24 hours before use to ensure the adhesive bonds sufficiently